

TARGET

PORTABLE GAS DETECTOR WITH 6-GAS CAPABILITY

FEATURES

- Up to 6 sensors including broad-range toxic
- Simultaneous display of all sensor readings
- 10 pre-programmed combustible response options
- User programmable for: location, person, date, and time
- Datalogging/STEL/TWA standard
- Peak Hold
- Remote display capability
- Push-button auto zero and calibration
- Flexible battery configurations
- Extended battery life
- Optional internal motorized sample pump
- Designed to minimize RFI
- Rugged metal enclosure
- Dual-rate battery charger
- Intrinsically safe design (US and European approval pending)
- Calibration/recalibration dating on display



2851 Brighton Road, Oakville, ON Canada L6H 6C9
Tel: (905) 829-4700 Fax: (905) 829-4701 1-800-367-4706
www.EnmetGasDetection.com e-mail: enmet@arjayeng.com




ENMET Corporation introduced the concept of a hand-held, multi-function gas detector for confined space monitoring back in 1974. Since then, ENMET has continued to pioneer the development of gas detectors for monitoring oxygen deficiency, as well as toxic and combustible gases. **TARGET** is the result of three decades of experience in the field of gas detection.

TARGET is based upon user input. This instrument provides the features you've asked for in the durable packaging ENMET is noted for — up to six sensors including broad-range toxic, peak hold, latching alarms, and multiple alarm levels — and all of this at an incredibly low price. **TARGET** is the correct size and shape — not too large, not too small, yet lightweight and durable. Options include internal motorized sample pump and flexible battery configurations.

Featuring an ergonomic design that allows true hands-free operation, combined with the functions users have asked for, **TARGET** hits the bull's eye!

TARGET

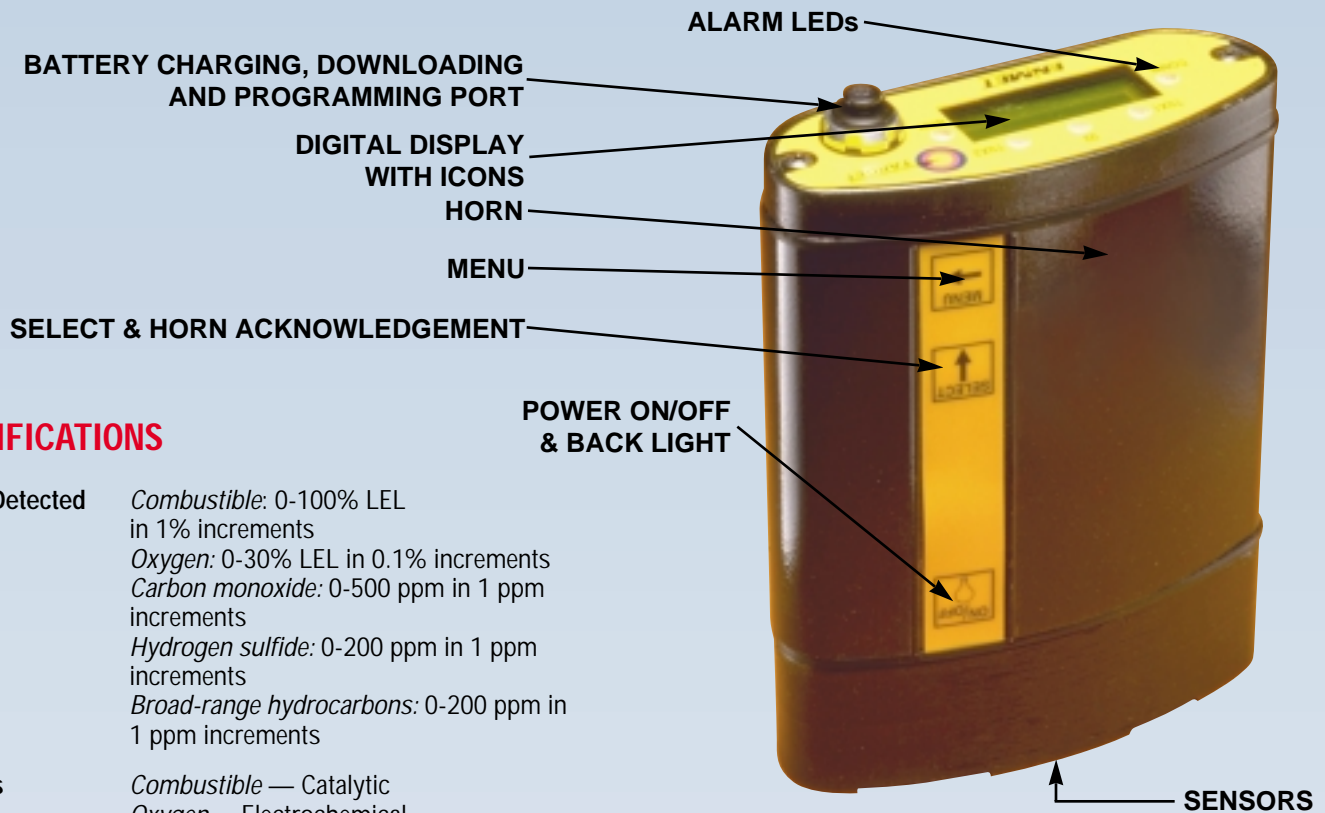

SPECIFICATIONS

Gases Detected	<i>Combustible:</i> 0-100% LEL in 1% increments <i>Oxygen:</i> 0-30% LEL in 0.1% increments <i>Carbon monoxide:</i> 0-500 ppm in 1 ppm increments <i>Hydrogen sulfide:</i> 0-200 ppm in 1 ppm increments <i>Broad-range hydrocarbons:</i> 0-200 ppm in 1 ppm increments
Sensors	<i>Combustible</i> — Catalytic <i>Oxygen</i> — Electrochemical <i>Toxic</i> — Electrochemical <i>Broad-range hydrocarbons</i> — Metallic Oxide Semiconductor (MOS)
Sampling Method	Diffusion or optional internal motorized pump
Power Source	Nickel metal hydride battery pack or optional alkaline
Battery Life	Up to 16 hours
Dimensions	6 x 4.5 x 1.7 inches (150 x 115 x 45 mm)
Weight	32 ounces (900 grams)
Operating Temp.	5° to 122°F (-15° to 50°C) Continuous
Humidity	5-99%, non-condensing
Display	Dot-matrix liquid crystal (LCD) with backlight, 4 lines 20 characters

ORDERING INFORMATION:

Description	Part No.
Target with CO, H ₂ S, LEL, MOS, O ₂	04830-0102-111
Target with CO, LEL, MOS, O ₂	04830-0100-111
Target with H ₂ S, LEL, MOS, O ₂	04830-0002-111
Target with CO, H ₂ S, LEL, O ₂	04830-0102-101
Target with CO, LEL, O ₂	04830-0100-101
Target with H ₂ S, LEL, O ₂	04830-0002-101
Target with LEL, MOS, O ₂	04830-0000-111

For internal pump versions change P/N prefix to 04831-

Other configurations available. Contact factory for details.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

